
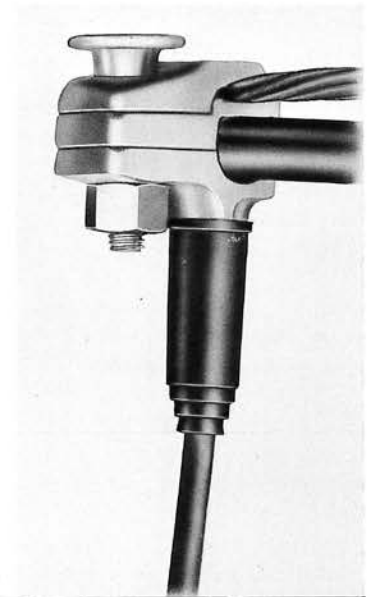


Announcing -----

the newest additions to
the **JERROLD** family of fine products

*“in any kind of weather we’ll
deliver your pictures better”*

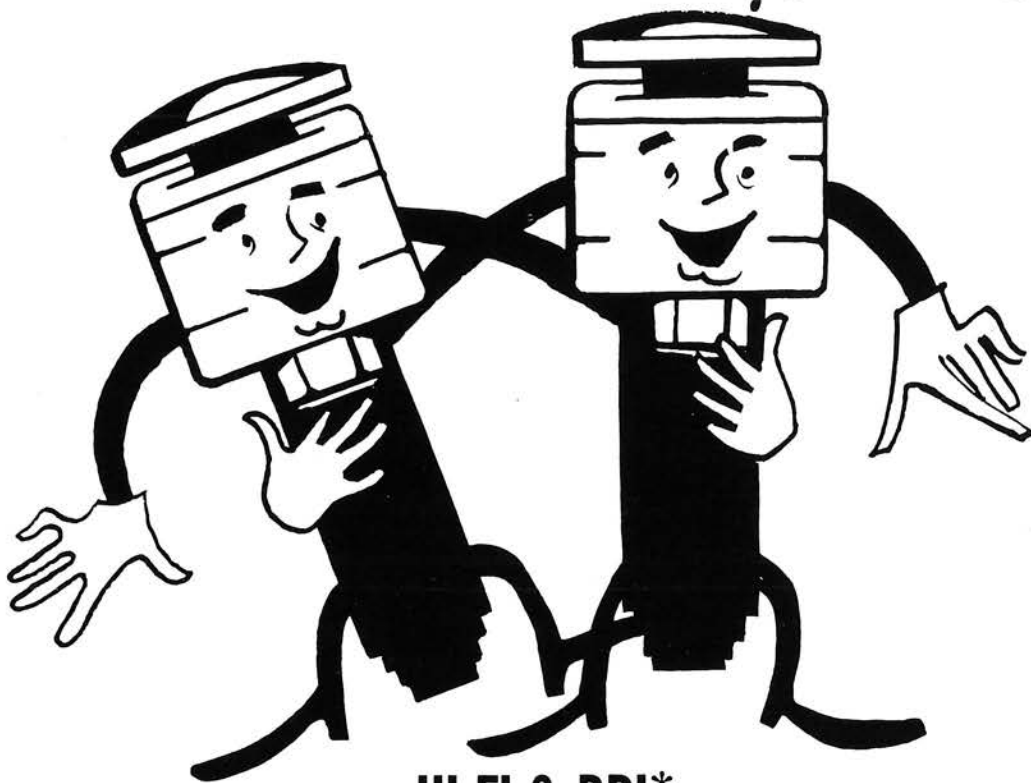

HI-FI & DRI*

*Trademark

THE NEW PRESSURE TAPS

**THAT ARE COMPLETELY WATERPROOF,
WEATHERPROOF & CORROSION RESISTANT**


MODELS HFD-1491, 1492

FEATURES

Waterproof • Weatherproof • Corrosion Resistant • Vertically Positioned isolation network • Neoprene sealing gland • Protective boot for isolation network • Non-corrosive stainless steel grounding pins and barrel insert collar • Withstands total immersion in water • Installs easily and quickly—No need to disassemble blocks • Accommodates 3/16" to 5/16" messenger cables

NEW JERROLD "HI-FI & DRI" PRESSURE TAPS MODEL HFD-1491—MODEL HFD-1492

The Weatherproof, Economical and Rapid Method of Feeding TV Receivers with R.F. Signals from a Common Coaxial Feeder Line

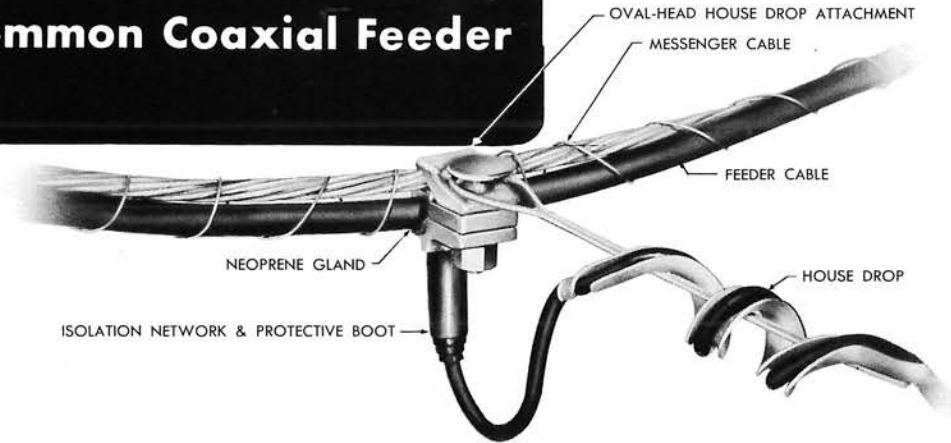

Protection-plus at low cost is the keynote of the newly-designed Jerrold Weatherproof Taps, Models HFD-1491 and HFD-1492. Jerrold has tailored them to eliminate the many problems afflicting taps from varying weather conditions.

A prime contributor to pressure tap failure—water damage—is eliminated by the uniquely-designed new HFD series of taps. They incorporate a special protective boot and Neoprene gland which, when properly installed, completely prevent entry of water or moisture through the grounding pins, cored hole, and house drop connector. This means that the taps may be totally immersed in water.

Rain and moisture will not collect on the units due to (1) the arrangement of the feeder line groove and messenger clamp and (2) the vertical design of the isolation network.

The oval-head house drop attachment easily accommodates either the loop of a snubber grip or 1/8" messenger. Both the oval-head bolt and mating hex-nut are protected by a hot-dip galvanized finish.

The HFD series of taps utilize the same cutting drills and isolation networks that have been used so successfully in Jerrold's other pressure taps. Due to the vertical position of the barrel insert, all pieces of cut braid will fall out of the cored hole as soon as the cutting tool is removed.

Units are available for both single (Model HFD-1491) and double (Model HFD-1492) shielded cables. The messenger clamp can handle any size messenger, from 3/16" to 3/8".

When ordering the new Jerrold Weatherproof Taps, specify either Model HFD-1491 for single shielded cable or Model HFD-1492 for double shielded cable and indicate the desired capacitive or resistive insert by using the coding shown in the charts.

TAP-OFF DATA/CHANNEL							
ISOLATION NETWORKS							
A=Isolation db B=Feed through db							
CH	MODELS						
	HFD-1491, HFD-1492						
	CAPACITIVE COLOR CODE						
	WHITE	RED	YELLOW	GREEN	BLUE	BLACK	
2	A	34	27	22	19	16	13
	B	—	—	.06	.12	.17	.30
3	A	34	26	21	18	15	12
	B	—	—	.08	.14	.22	.40
4	A	33	25	20	18	14	11
	B	—	—	.10	.16	.25	.40
5	A	30	23	19	17	13	10
	B	—	.06	.11	.18	.29	.50
6	A	28	21	18	16	13	9
	B	—	.10	.12	.20	.30	.60
FM	88—108 MC						
7	A	26	17	14	11	9	—
	B	—	.11	.25	.54	.91	—
8	A	25	17	14	11	8	—
	B	—	.11	.28	.57	1.03	—
9	A	24	17	13	10	7	—
	B	—	.12	.30	.60	1.15	—
10	A	23	17	13	10	7	—
	B	—	.13	.32	.62	1.22	—
11	A	23	17	13	9	7	—
	B	—	.14	.33	.64	1.29	—
12	A	.22	16	12	9	6	—
	B	.05	.15	.35	.67	1.38	—
13	A	22	15	11	9	6	—
	B	.05	.15	.50	.90	1.50	—
RESISTIVE TAPS	CHAN. 2 thru CHAN. 13	PTR-40		PTR-35		PTR-30	
MODEL PTR		A	B	A	B	A	B
		40	.05	35	0.1	30	0.2



ELECTRONICS CORPORATION • COMMUNITY SALES DEPARTMENT

THE JERROLD BUILDING • 15th and Lehigh Avenue • Philadelphia 32, Pennsylvania